




C6241/46/46E/51/56/56E

卧式车床 ENGINE LATHE

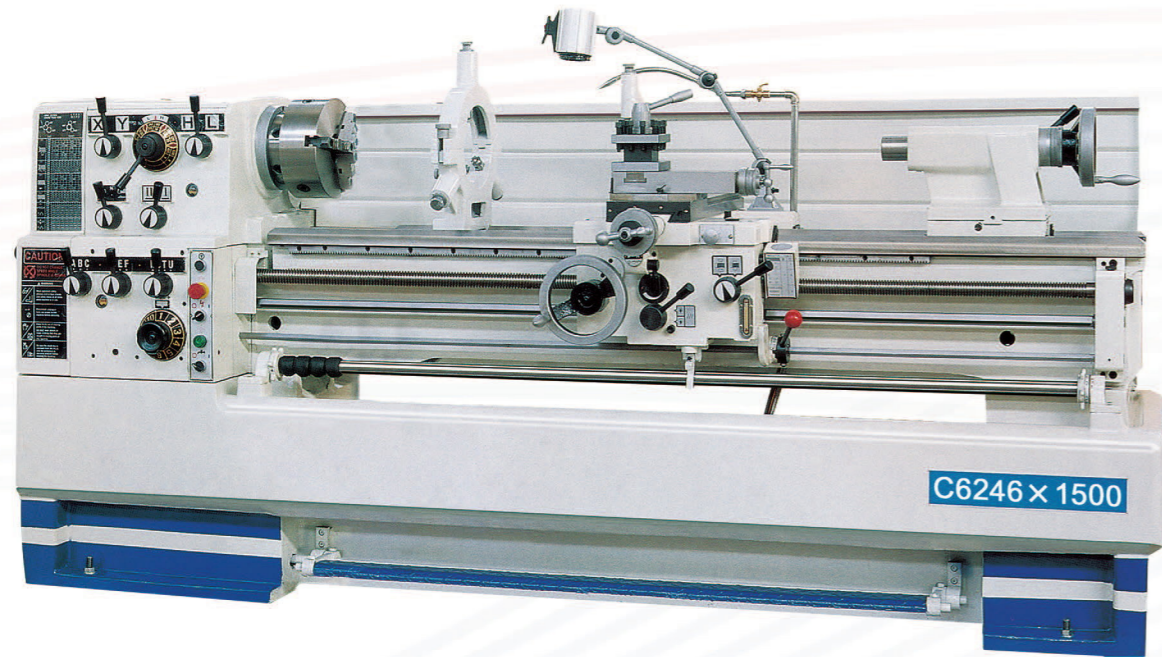

特点 / Features

- ◆ 整体床座和分体床座可供选择
- ◆ Whole or segregate foot stand for optional

标准附件 / Standard accessories

- 三爪卡盘
- 变径套及顶尖
- 油枪
- 3 Jaw chuck and adapter
- Sleeve and center
- Oil gun

特殊附件 / Special accessories

- 四爪卡盘
- 花盘
- 拔盘
- 中心架
- 跟刀架
- 工作灯
- 脚刹
- 冷却
- 4 Jaw chuck and adapter
- Face plates
- Driving plate
- Steady rest
- Follow rest
- Work light
- Foot brake
- Coolant

机床规格及技术参数 / Specification

技术参数	Specification	Model					
		C6241	C6246	C6246E	C6251	C6256	C6256E
床身上最大工件回转直径	Swing over bed	410mm(16")	460mm(18")	460mm(18")	510mm(20")	560mm(22")	560mm(22")
拖板上最大工件回转直径	Swing over cross slide	220mm (8-13/16")	270mm (10-3/4")	270mm (10-3/4")	305mm (12")	355mm (14")	355mm (14")
马鞍内最大工件回转直径	Swing in gap diameter	640mm (25-1/8")	690mm (27-1/8")	690mm (27-1/8")	735mm (28-7/8")	785mm (30-7/8")	785mm (30-7/8")
顶尖距	Distance between centers		1000mm(40") 1500mm(60") 2000mm(80")			1000mm(40") 1500mm(60") 2000mm(80") 3000mm(120")	
花盘前马鞍有效长度	Valid length of gap		165mm(6-1/2")			170mm(6-11/16")	
床身宽度	Width of bed		300mm(11-13/16")			350mm(13-13/16")	
主轴端部	Spindle nose		D1-6	D1-8		D1-8	
主轴通孔直径	Spindle bore		58mm(2-1/4")	80mm(3-1/8")		80mm(3-1/8")	105mm(4-1/8")
主轴内孔锥度	Taper of spindle bore		No.6 Morse	No.7 Morse		No.7 Morse	φ113 (1:20)
主轴转速范围	Range of spindle speed		12 changes, 25 ~ 2000r/min			12 changes, 25 ~ 2000r/min	
小拖板行程	Compound rest travel		128mm(5")			130mm(5-1/8")	
中拖板行程	Cross slide travel		285mm(11-1/4")			316mm(12-7/16")	
刀具最大截面	Max.section of tool		25×25mm(1" × 1")				
大丝杠螺距	Lead screw thread		6mm or 4T.P.I.				
纵向进给	Longitudinal feeds range		42 kinds, 0.031 ~ 1.7mm/rev (0.0011" ~ 0.0633" /rev)			35kinds, 0.059 ~ 1.646mm/rev (0.0022" ~ 0.0612" /rev)	
横向进给	Cross feeds range		42 kinds, 0.014 ~ 0.784mm/rev (0.00033" ~ 0.01837" /rev)			42 kinds, 0.020 ~ 0.573mm/rev (0.00048" ~ 0.01354" /rev)	
公制螺距范围	Threads metric pitches		41 kinds, 0.1 ~ 14mm			47 kinds, 0.2 ~ 14mm	41 kinds, 0.1 ~ 14mm
英制螺距范围	Threads imperial pitches		60 kinds, 2 ~ 112T.P.I.				
径节制螺距范围	Threads diametral pitches		50 kinds, 4 ~ 112DP				
模数制螺距范围	Threads module pitches		34 kinds, 0.1 ~ 7MP				
尾座套筒直径	Quill diameter		60mm(2-5/16")			75mm(2-15/16")	
尾座套筒行程	Quill travel		130mm(5")			180mm(7-1/16")	
尾座套筒内孔锥度	Quill taper		No.4 Morse			No.5 Morse	
主电机	Main motor power		5.5kW(7.5HP) 3PH			7.5kW(10HP) 3PH	
冷却泵	Coolant pump power		0.1kW(1/8HP) 3PH				
外形尺寸(长×宽×高)	Overall dimension(L×W×H)	220×108×134cm 275×108×134cm 325×108×134cm	220×108×137cm 275×108×137cm 325×108×137cm	220×108×137cm 275×108×137cm 325×108×137cm	239×115×143cm 284×115×143cm 334×115×143cm 434×115×143cm	239×115×146cm 284×115×146cm 334×115×146cm 434×115×146cm	239×115×146cm 284×115×146cm 334×115×146cm 434×115×146cm
包装箱尺寸(长×宽×高)	Packing size(L×W×H)	225×112×162cm 280×112×162cm 330×112×162cm	225×112×162cm 280×112×156cm 330×112×156cm	225×112×162cm 280×112×156cm 330×113×156cm	245×119×174cm 290×119×174cm 340×119×174cm 440×119×174cm	245×119×174cm 290×119×174cm 340×119×174cm 440×119×174cm	245×119×174cm 290×119×174cm 340×119×174cm 440×119×174cm
净重	Net weight	1580kg 1745kg 1900kg	1645kg 1810kg 1965kg	1645kg 1810kg 1965kg	2070kg 2160kg 2435kg 2805kg	2195kg 2285kg 2560kg 2930kg	2195kg 2285kg 2560kg 2930kg
毛重	Gross weight	1844kg 2049kg 2229kg	1910kg 2115kg 2295kg	1910kg 2115kg 2295kg	2460kg 2550kg 2840kg 3270kg	2600kg 2690kg 2980kg 3410kg	2600kg 2690kg 2980kg 3410kg