

# Houing- Type Metal Band Sawing Machine Series

## 龙门卧式金属带锯床




### G4250

#### 龙门卧式金属带锯床

- 本机采用最新液压技术，油温低，增加锯切的稳定性。
- 液压控制锯切进给、带锯床的张紧及工作夹紧。
- 龙门式结构，刚性好。
- 双油缸控制，进给平稳。
- 屑刷自动清屑，提高锯条寿命。
- 平台液压送料机构。
- 机动送料辊道和承料辊道。
- 根据要求可定做自动输屑装置。

- The machine uses the latest hydraulic technology, the oil temperature is low, increase the stability of sawing.
- Hydraulic control cutting feeding, tensioning and clamping work with Saw.
- Gantry structure, good rigidity.
- Dual cylinders control, feed stable.
- Automatic Clearing brush crumbs crumbs, increase blade life.
- Hydraulic platform feed mechanism.
- Motorized feed roller and feed roller bearing.
- Automatic transmission can be customized according to the requirements of device chips.

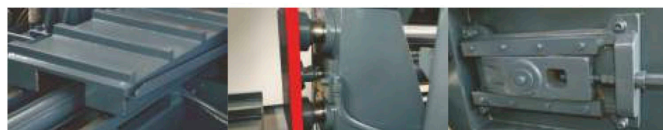

### G4265/80

#### 龙门卧式金属带锯床

产品型号	G4250	G4265/80	G4265/100
锯切能力 (mm)	● Φ500 ■ 500x700	● Φ650 ■ 650x800	● Φ650 ■ 650x1000
线速 (m/min)	22,45,65	20,40,60	20,40,60
带锯条 规格 (mm)	5880x41x1.3	6700x54x1.6	7100x54x1.6
清洁	钢丝刷和锯切液 Wire brush and cutting fluid	钢丝刷和锯切液 Wire brush and cutting fluid	钢丝刷和锯切液 Wire brush and cutting fluid
主电机 (kw)	5.5	5.5	7.5
液压 (kw)	1.5	2.2	2.2
冷却泵 (w)	90	120	120
虎钳夹紧方式	液压夹紧 Hydraulic clamping	液压夹紧 Hydraulic clamping	液压夹紧 Hydraulic clamping
锯条张紧方式	手动 Manually	手动 Manually	手动 Manually
机器重量 (kg)	3500	4360	4500
包装尺寸 (mm)	2750x2600x2250	4350x3000x2850	4600x3000x2850